

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 July 2004 (29.07.2004)

PCT

(10) International Publication Number
WO 2004/062870 A1

(51) International Patent Classification⁷: **B29C 33/40**,
C08K 5/00, H01J 19/02

[JP/JP]; 19-16, Komaicho 3-chome, Komaie-shi, Tokyo
201-0016 (JP).

(21) International Application Number:
PCT/US2003/039141

(74) Agents: FISCHER, Carolyn A., et al.; Office of Intellectual
Property Counsel, Post Office Box 33427, Saint Paul,
MN 55133-3427 (US).

(22) International Filing Date:
10 December 2003 (10.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-004717 10 January 2003 (10.01.2003) JP

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility
model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE
(utility model), DE, DK (utility model), DK, DM, DZ, EC,
EE (utility model), EE, EG, ES, FI (utility model), FI, GB,
GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL,
PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): 3M IN-
NOVATIVE PROPERTIES COMPANY [US/US]; 3M
Center, Post Office Box 33427, Saint Paul, MN 55133-
3427 (US).


(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): SUGIMOTO, Takaki

[Continued on next page]

(54) Title: FLEXIBLE MOLD, METHOD OF MANUFACTURING SAME AND METHOD OF MANUFACTURING FINE
STRUCTURES

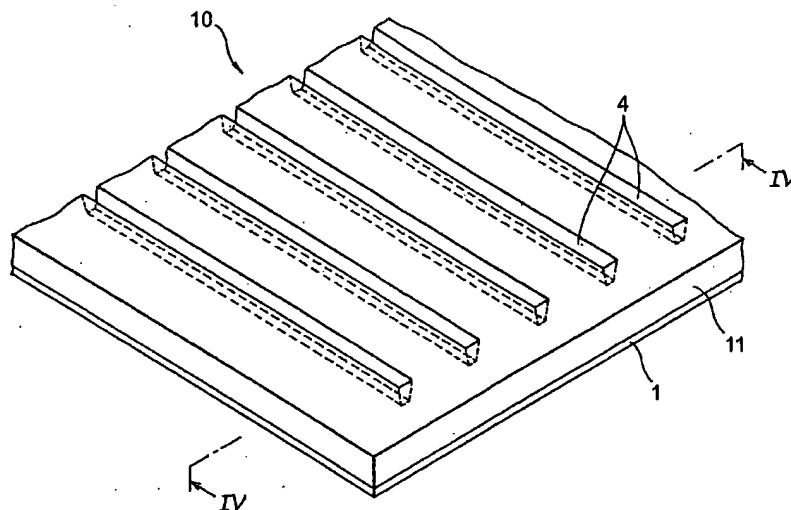

(57) Abstract: A flexible mold (10) having a mold layer (11) that is provided on the surface thereof with a groove pattern (4) of specified shape and size, is constructed such that the mold layer contains a lithium salt of an organic fluorine compound as an antistatic agent.

WO 2004/062870 A1